

Q-Products

Q-Loc™ Direct Burial Lighting Connector

US Patent # 9,425,545

NewLite's Q-Loc™ Lighting Connector was designed specifically to make your lighting jobs cleaner and easier to install. It's innovative locking bolt creates a quick connection, and allows for safe movement of the fixtures during final placement. Keeping in mind that every connection need two connectors, we designed our connectors to snap together allowing for a cleaner looking installation. The earth toned color and the grouping of the connectors allows the Q-Loc™ to be easily hidden in the landscape.

- Unique Locking Bolt tightens down on the wire jacket, not the connection point.
- Deep Cavity holds large sized landscape lighting wire.
- Patented distribution of silicone gel makes sure you have a water-tight seal every time.
- Pre-Greased for easy and clean application while protecting your connection points from nature's elements.
- Designed for use in damp, wet and rain tight locations (Not to be used in continuous submersion applications).

Q-LOC™ Wire Connector Installation Instructions



Open top Locking Bolt:

Turn the top locking bolt counter clockwise until there is a clear pathway through the front opening of the connector. No need to fully remove.



Insert striped wires:

Strip wires 3/4"-1", Fan and Pre-Twist ends then insert into the connector as far as the wire will travel.



Hand tighten Locking:

No need to over tighten. The locking bolt will press against the wire jacket and not the bare copper ends; giving it a better hold and secure connection.



For a clean installation:

Press the male end of one connector into the female end of another connector. This will group your connectors together, and give a clean looking installation.


Wire Range: Min #20 / Max # 10 • **Temperature Rating:** 105°C (221°F) • **Sealant Temperature:** -45° F to 400° F

Important: Turn off all power before installing or removing any connectors. For use in damp, wet, rain-tight, and short term submersible locations. Not to be used in continuous submersion applications.

Q-Wrap™ Drip Repair Tape

Originally developed for the US military. The next generation Q-Wrap is a self-bonding wrap made from a special high-quality silicone rubber compound which adheres to itself when wrapped under tension. Q-Wrap forms a non-conductive, air and water tight seal.

- Seals leaky or broken Tubing, Pipe, Fittings, Hoses & More!
- Holds to any Surface / Forms to any Shape
- Works on Wet, Dirty or Dry Surfaces
- Does not stick to pipe surface
- Resists UV, Solvents, Oils, Chemicals & Salts
- Better than heat shrinkable tubing
- Never gets Gummy or Sticky / No Messy Cleanup

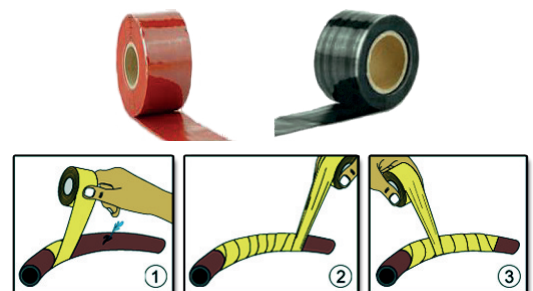

Part Numbers:

Blister Packaging

- NLQW-B (Black 25mm x 3m)
- NLQW-R (Red 25mm x 3m)

Bulk Roll

- NLQW-BBulk (Black 25mm x 11m)